



Description and Features

The GI40/2 is a passive piezoelectric AE sensor, waterproof and all-metal shell features make it possible to be buried in the ground or work in the liquid for long-term monitoring.

Applications



This sensor could be used underground for monitoring geologic structures like slope. It also could be used for monitoring leakage and corrosion of storage tanks or valves and for also detecting partial discharge.

Standards



Calibration standard	ISO12714
	GB/T 19801


Technical Specs

Resonant Freq. Ref V/(m/s)	40kHz
Frequency Range	15kHz-70kHz
Sensitivity Peak Ref V/(m/s)	>75dB
Integral preamplifier	40dB28V
Preamp. Impedance	50 Ω
Working Temp.	-20 to 50 °C
Size (DxH)	41×92mm
Weight	1280 g
Case Material	SUS-304
Face Material	SUS-304
Protecting Grade	IP68
Connector	BNC on integral cable
Connector Location	Top

Accessories

Signal cable model	SYV-50-3/ STYV-50-2
--------------------	------------------------

AE SENSOR CALIBRATION CERTIFICATE

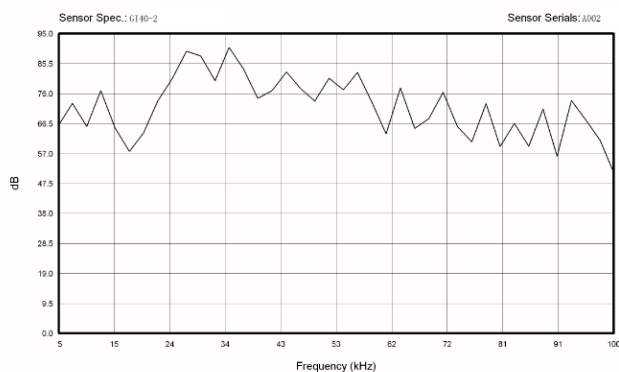

Certification



QingCheng AE Institute (Guangzhou) Co., Ltd

Website: www.aendt.com Tel: +86-20-32290092 E-mail: sales2@ae-ndt.com Skype: Jessicajia

Address: Room 601-9, Building 3, 232 Kezhu Road, Huangpu District, Guangzhou City, Guangdong Province, CHINA