



Description and Features

G10 is an ultra low frequency AE sensor with narrowband. And 1Hz -15kHz bandwidth makes it suitable for detecting very low frequency acoustic emission signals like geologic structure and leakage.

Technical Specs

Frequency Range	1Hz -15kHz
Sensitivity Peak Ref V/(m/s)	>80dB
Working Temp.	-20 to 120°C
Size (DxH)	31×38mm
Weight	213g
Case Material	SUS-304
Face Material	Ceramic
Protecting Grade	IP62
Connector	BNC
Connector Location	Side

Accessories

Signal cable model	SYV-50-3/ STYV-50-2
Hold-down	M36
Preamplifier	PAS/PAV



Applications


The ultra low frequency characteristic makes it suitable for monitoring geologic structures like slope. It also could be used for monitoring leakage and corrosion of pressure vessels or valves.



Standards

Calibration standard	ISO12714
	GB/T 19801

AE SENSOR CALIBRATION CERTIFICATE

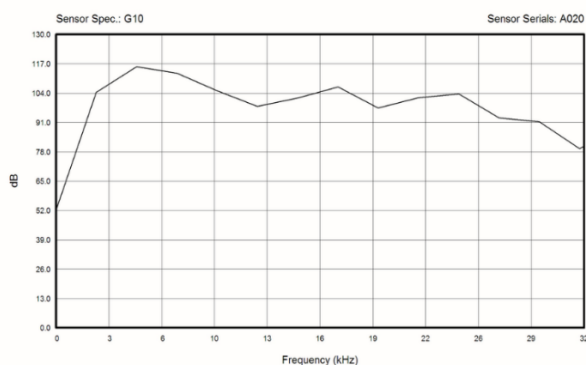

Certification



QingCheng AE Institute (Guangzhou) Co., Ltd

Website: www.aendt.com **Tel:** +86-20-32290092 **E-mail:** sales2@ae-ndt.com **Skype:** Jessicajia
Address: Room 601-9, Building 3, 232 Kezhu Road, Huangpu District, Guangzhou City, Guangdong Province, CHINA

Specifications subject to change without notice. Copyright @ 2022 Qingcheng AE Institute. All Rights Reserved.